# Ø 12,6” x 8,425” Ø 320 x 214 mm

**112BC**

ETRI®

*400 Hz Fans*

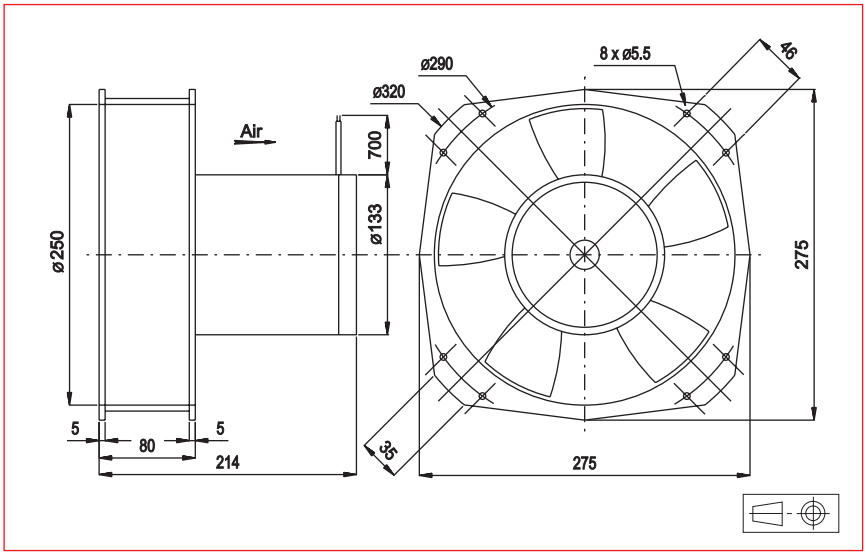

## Approvals

NATO codification (not on all part numbers, please consult the factory for more detailed information)

## Life expectancy

L-10 LIFE AT 40°C:
25 000 hours

**400 Hz Motor**
Housing material: aluminium
Impeller material: aluminium
Weight: 9,5 kg
Bearing system: ball bearings

Connection: flying leads

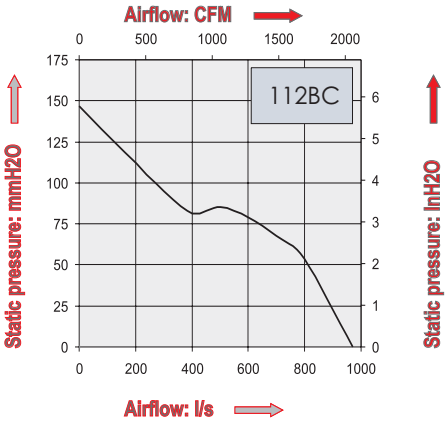


| Part Number | Nominal voltage | Airflow | | Noise level | Nominal speed | Phases | Capacitor (not included) | Input power | Nominal Current | Starting Current | Operating temperature | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | V | l/s | Cfm | dB(A) | RPM | | µF | W | mA | mA | Min.°C | Max.°C |
| 112BC0162C13 | 115 | 970 | 2055,4 | 85 | 5500 | 3 | | 1250 | 7250 | 24000 | -10 | 70 |
| 112BC0160C13 | 200 | 970 | 2055,4 | 85 | 5500 | 3 | | 1250 | 4200 | 14000 | -10 | 70 |

**Additional versions:**
Salt spray protected - Shock and vibration protected - Thermally protected - Marine specifications - Wide temperature range




*Non contractual document. Specifications are subject to change without prior notice. Pictures for information only. Edition 2011*