

Approvals



Life expectancy




L-10 LIFE AT 40°C:
25 000 hours

Brushless DC Motor

Electrical protection: integrated circuit
Housing material: plastic UL 94 V0
Impeller material: plastic UL 94 V0
Maximum weight: 95 g
Bearing system: ball bearings
Connection: flying leads
IP 20

Available with:

- Speed sensor
- Alarm
- IP 54 / IP 55

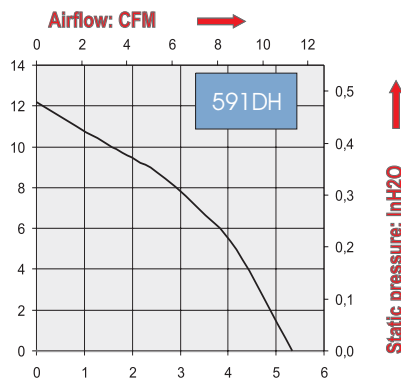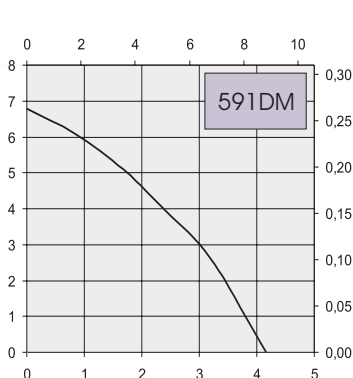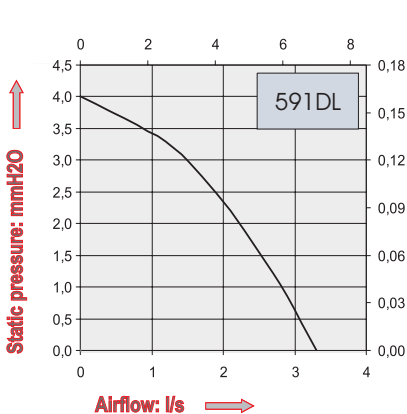

Part Number	Nominal voltage	Airflow	Noise level	Nominal speed	Input Power	Voltage range	Operating temperature	
	V	l/s	dB(A)	RPM	W	V	Min.°C	Max.°C
591DL1LP11000	12	3,3	26	1900	0,72	(7-13,8)	-10	60
591DL2LP11000	24	3,3	26	1900	1,20	(14-27,6)	-10	60
591DM1LP11000	12	4,2	32	2350	1,56	(7-13,8)	-10	60
591DM2LP11000	24	4,2	32	2350	1,68	(14-27,6)	-10	60
591DH1LP11000	12	5,3	38	2900	2,64	(7-13,8)	-10	60
591DH2LP11000	24	5,3	38	2900	2,88	(14-27,6)	-10	60