


# 125E

## 120x120x38mm

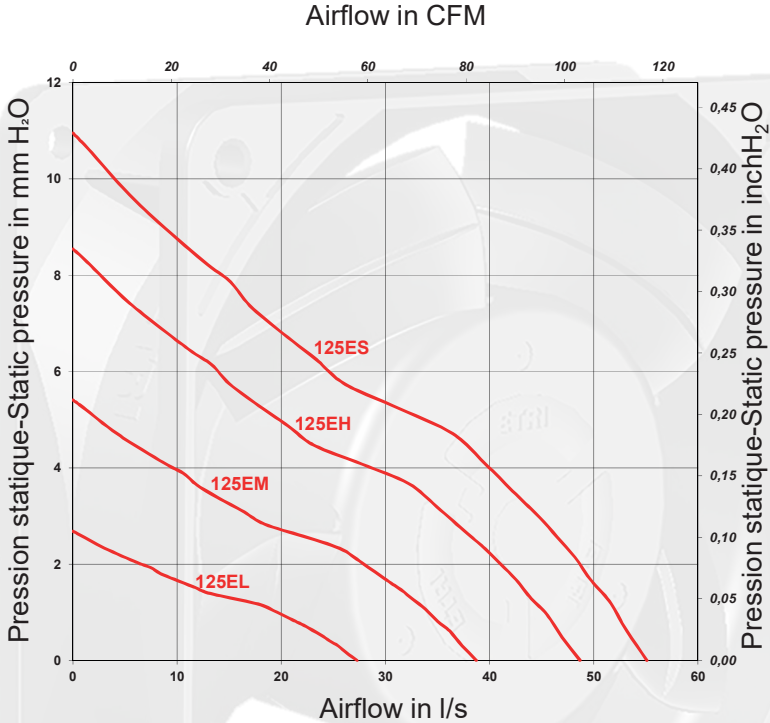

- 85 to 265 V
- 50-60Hz
- Up to 70°C
- Up to -20°C
- L-10 life expectancy at 40°C:  
Up to 80.000 hours
- Up to IP20
- Housing in plastic UL94V-0
- Impeller in plastic UL94V-0

#### Available with:

- Speed sensor
- Alarm
- Salt spray protection
- Shock and vibration protection

